

PRODUCT INFORMATION SHEET



One Zenex Circle • Cleveland, Ohio 44146
Toll Free: 866-217-5100 • Fax: 440-232-5101

ZenaLube Moly

Dry Moly Lubricant
ZENEX NUMBER 496950

DESCRIPTION

This product's micro-sized molybdenum disulfide provides excellent anti-friction and anti-seize properties.

FEATURES AND BENEFITS

ZenaLube Moly is non-corrosive, adheres to most materials, repels dust and dirt, and greatly increases operating efficiency.

APPLICATIONS AND USES

Designed to use on areas servicing high temperatures (-28°F/-33°C - 600°F/315°C) and high pressure conditions.

DIRECTIONS FOR USE


Shake can vigorously for one minute after mixing ball begins to rattle. Clean surface thoroughly. Hold can 6 to 8 inches from surface and apply evenly. Thin coats are preferable. Allow 1 to 5 minutes for adequate drying. The concentration of solids in this product may clog nozzle. Shake vigorously and often. Before storing, turn can upside-down and spray until clear.

SIZE / AVAILABILITY

16 oz. Aerosol
Net Weight 14 oz.
12 per case

STATE RESTRICTION

Not available for sale in California.

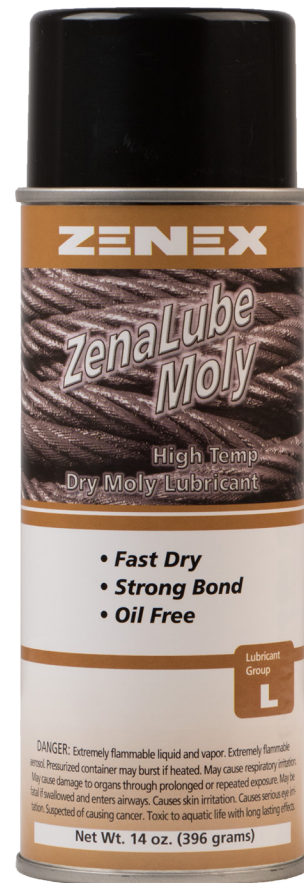

**Emergency
Phone Number
(800) 535-5053**

HMIS	
HEALTH	2
FLAMMABILITY	3
REACTIVITY	0
PERSONAL PROTECTION	B

